GB2090927

Publication Title:

A METHOD OF PREVENTING ERRONEOUS GEAR SELECTION IN AN AUTOMATIC GEAR SELECTION SYSTEM IN VEHICLES

Abstract:

Abstract not available for GB 2090927

(A)

----

(12) UK Patent Application (19) GB (11) 2 090 927 A

(54) **A method of preventing erroneous gear selection in an automatic gear selection system in vehicles**

(57) In a vehicle transmission having a system for automatic gear selection, the selection of an operationally incorrect gear is prevented in the case where a signal representing a vehicle wheel rotational speed, e.g. during braking of the vehicle, does not constitute a correct representation of the vehicle speed. There is thus calculated in the system the wheel rotational speed change, which is compared with a predetermined retardation value. If the retardation limiting value is exceeded, a circuit is activated for ensuring that an incorrect gear selection is prevented, e.g. by selecting neutral gear.

For providing, particularly during pulsing braking of long duration, a correct determination of when the wheel has returned to a stable state, the return to normal gear selection occurs only when the wheel speed has reached a given limiting value and the wheel speed change is less than a predetermined limiting value.
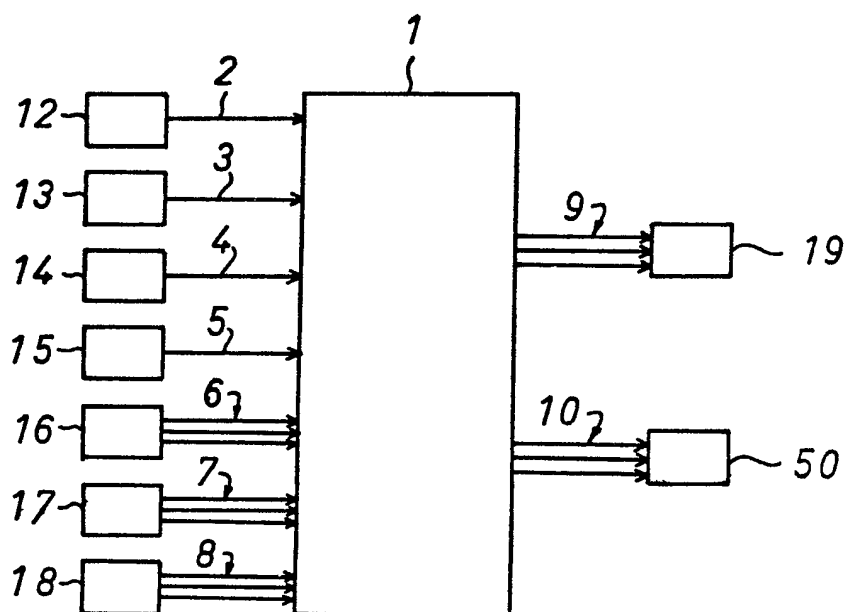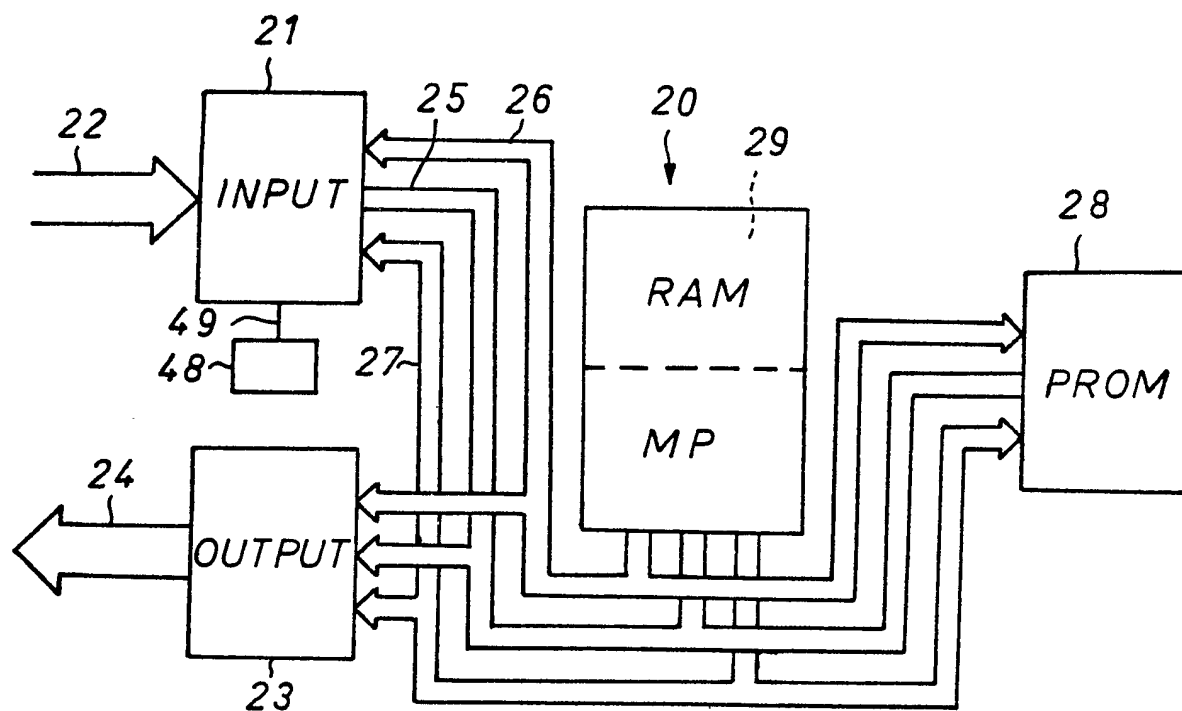
GB 2 090 927 A
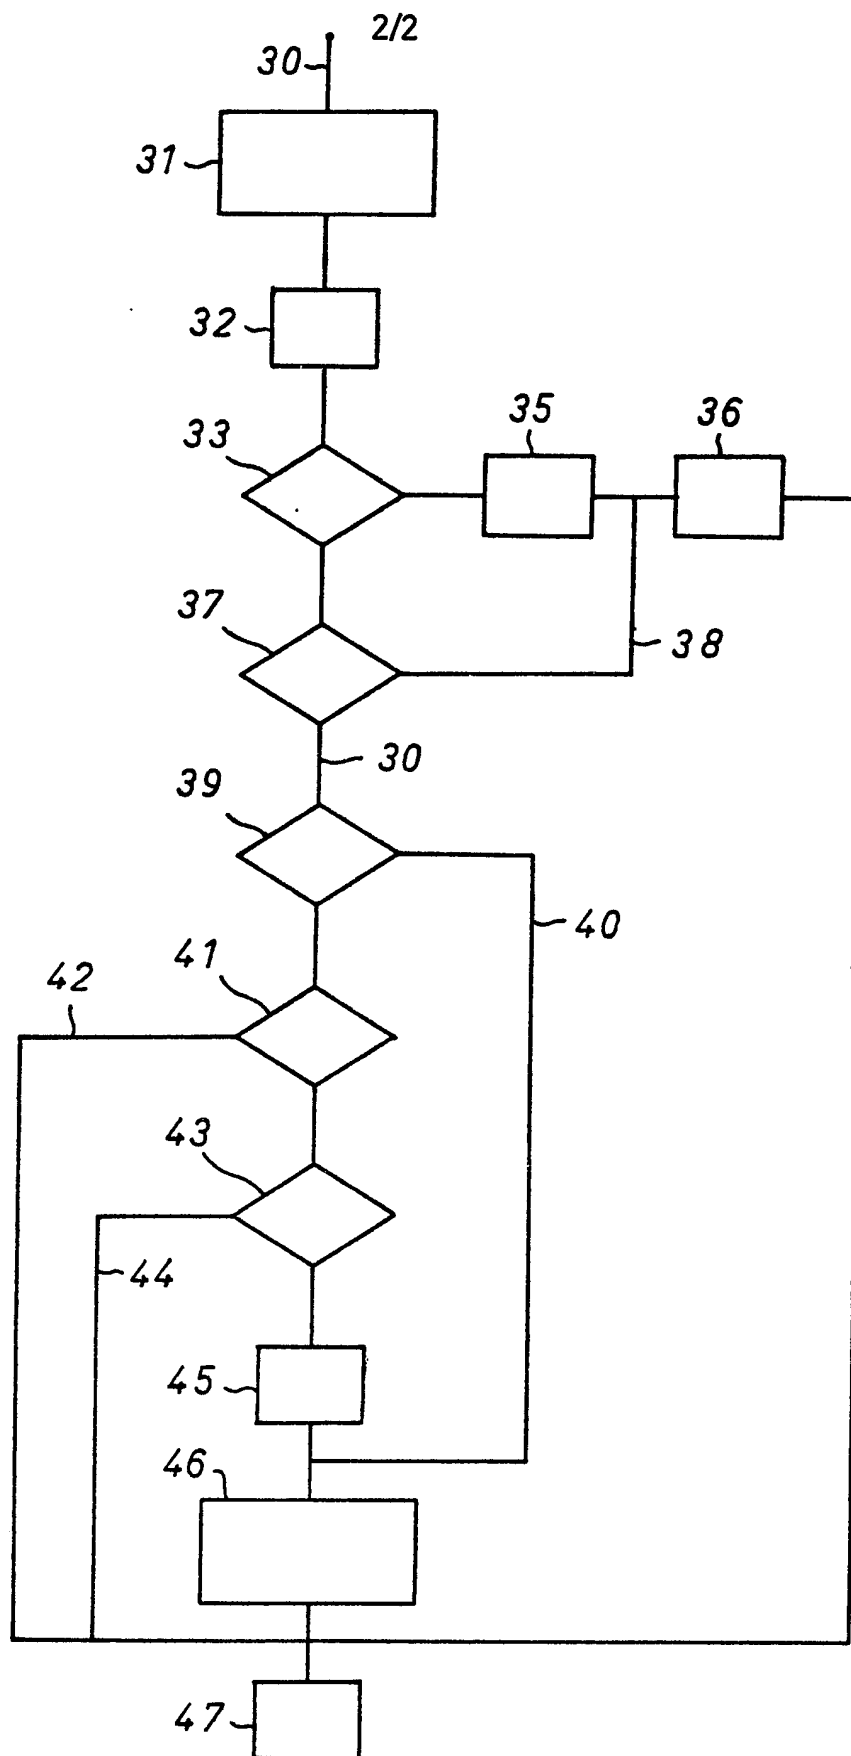
F i g   1

F i g   2

Fig 3

SPECIFICATION
A method of preventing erroneous gear selection in an automatic gear selection system in vehicles

5   The present invention relates to vehicles and is directed towards a method for preventing, in a gearbox coacting with a system for automatic gear selection, the selection of an operationally incorrect gear in the cases where the r.p.m. of a
10   vehicle wheel is not a correct representation of the vehicle speed, e.g. during braking of the vehicle, means in the system calculating the instantaneous r.p.m. alteration of the wheel, comparing it with a predetermined retardation value and sending an
15   output signal if the calculated r.p.m. variation exceeds said predetermined retardation value, said output signal activating an operative circuit or the like which thereby caters for the selection of a neutral gear position and/or triggers fault ·
20   indication in alarm means.
          Through the U.S. Patent No. 4,126,061 it is previously known to make a retardation comparison when a vehicle is braked and to let the output signal from such a comparison control the
25   energization of an operative circuit which causes selection of a neutral gas position for a predetermined period of time, after which the system returns to a normal condition. The means that the known system mentioned returns after a
30   longer braking process, especially a pulsing process, to normal gear selection in spite of braking still being in process. Unsuitable gear selection will be the result hereof, which can have fatal consequences when the selected gear is
35   engaged, from the aspect of mechanical as well as traffic safety.
          The present invention has the task of providing, in accordance with the introduction to the description, a method which eliminates the risks
40   of erroneous gear selection. With the said objective, the invention is distinguished in that energizing of the operative circuit is interrupted when the wheel speed represents a certain vehicle speed and the wheel speed variation calculated in
45   the system is less than a predetermined value.
          By means of the inventive method, it is ensured that the system returns to normal gear selection function when a wheel, the speed of which is sensed and which is entirely or partially locked
50   during braking, once again returns to a stabilized condition relative the substructure.
          Other features distinguishing the invention will be seen from the description below and the following patent claims. The description is made
55   with reference to the appended drawing, where:
          Fig. 1 schematically illustrates a system for automatic gear selection,
          Fig. 2 illustrates in the same way a unit included in the system according to Fig. 1, and
60   Fig. 3 is a flow diagram for gear selection, and illustrates the sensing of a stable wheel condition.
          The exemplified arrangement is primarily intended for application in an automatic gear selection system for heavy vehicles, the selected

65   gear being engaged in a gear change process initiated manually by the driver. A conventional mechanical transmission with a main clutch between engine and gearbox can thus be retained unchanged, which signifies that the comparatively
70   high efficiency of the transmission can also be utilized. In an advantageous implementation of the gear selection system, the automatic gear selection may however be disengaged to enable a purely manual gear selection. The system also
75   allows casual manual operation even if the automatic gear selection system is engaged. After manual selection of a different gear, the driver has a certain time, 10 seconds for example, to initiate the gear change process. The initiation may, for
80   example, take place by the clutch being depressed, the system then sensing the movement and thereafter automatically taking care of the gear change. When the gear change is completed, this is indicated to the driver by a
85   buzzer and/or indication lamp, whereupon the driver can again engage the clutch. The system is thereafter prepared for a new gear selection.
          The gear selection system in question operates with input signals relating to a number of
90   parameters which are schematically illustrated in Fig. 1. A signal representing the engine load is thus fed to a control unit 1 via a line 2. With an engine equipped with supercharging, said load signal is suitably proportional to the boost
95   pressure in the engine induction system 12. In another application, the position of the vehicle accelerator pedal may constitute a measure of the engine load. Via a line 3 there is fed to the control unit a signal corresponding to the speed of a
100   vehicle wheel, which in most cases is proportional to the speed of the vehicle. In practice, it is suitable to sense the r.p.m. of the gearbox output shaft 13. A signal responsive to the position of a clutch 14 between engine and gearbox and
105   operable by the driver is taken to the control system via a line 4 as well as a signal via a line 5, the latter signal being responsive to whether the engine is running or not. The latter state is suitably sensed at the generator 15 conventionally
110   connected to the engine. The input signal in a line bunch 6 represents the position of a function selector 16 operable by the driver and which includes the four following alternative positions: a first position relating to driving with manual gear
115   selection, a second position relating to driving with automatic gear selection, a third position relating to selection of neutral gear, and a fourth position relating to selection of reverse gear. A signal from a manually operable gear lever 17 is
120   fed to the control unit 1 via a line bunch 7, and via a line bunch 8 signals representing the state of the gearbox 18, i.e. if a gear is engaged and if so, which one.
          In response to said input signals, the control
125   unit 1 generates output signals. Output signals are fed via a line bunch 9 to operative means 19 for executing the gear change, e.g. to a number of solenoid valves controlling compressed air or pressurized hydraulic oil to a number of cylinder

units executing the gear change movements.
Output signals are also fed via a line bunch 10 to a
display unit 50 having a buzzer or similar means
for notifying the driver of the gear selection, the
5 gear change completion or whether errors have
occurred in the control system.
    The control unit illustrated in Fig. 2 is built up
around a microprocessor denoted MP 20, which in
a manner known per se via a number of input
10 circuits 21 is conventionally fed with input signals
via the lines 2, here represented by a line bunch
22. Output circuits 23 adjust the control unit's
signals on the line bunches 9, 10, here
represented by a line bunch 24, to what is
15 required for actuation of the operative means 19
and the display/buzzer unit 50. In the input and
output circuits 21, 23 there are also protective
circuits which protect the MP 20 against signals
disturbing its function. The output circuits 23 also
20 include an amplifier which amplifies the output
signal of the control unit to a level required to
actuate the solenoid valves.
    Via data lines, address lines and control lines,
i.e. data bus 25, address bus 26 and control bus
25 27, the MP 20 coacts in a manner known per se in
the microcomputer art which said input and
output circuits 21, 23 as well as with an external
programmable read-only memory denoted
PROM 28, and a random access memory denoted
30 RAM 29, built into the MP 20. This is the case, for
example, if the MP 20 is of the 6802 type (e.g.
made by Motorola), which type has been found
advantageous in applying the present invention.
    In the control unit there is also included a low-
35 frequency oscillator 48, the pulsed output signals
of which are applied via the line 49 to the input
circuits 21. Each signal pulse from the oscillator
48, as with each pulse in the signal pulses sent
from a speed transducer, results in that the MP 20
40 is inhibited from executing an interrupt program
for speed and acceleration calculation.
    According to the interrupt program, which is
not described in more detail, the speed is
calculated from the number of speed pulses
45 arriving between two pulses from the low-
frequency oscillator 48, which corresponds to a
time of 0.5 seconds. The speed value thus
represents a mean valve for said period of time.
The speed variation is calculated as the difference
50 between two sequentially calculated speed values.
    A program is stored in the PROM 28 for
automatic gear selection, and when the program
is being executed, a flow diagram illustrated in
Fig. 3 is followed. Said gear selection program
55 constitutes a part of a more extensive gear change
program, which has gone through a plurality of
control routines before a flow path 30 follows the
diagram according to Fig. 3. With the availability
of manual operation of the automatic gear change
60 system, there is required a routine to decide to
what extent the operating means for manual gear
selection is actuated or not. Said routine is
represented by a block 31 illustrated in the figure.
If said operating means is activated, the block 31
65 begins a count-down of a time register, e.g.

10 seconds. Within this time, the driver has the
possibility to utilize the manual gear selection. If
he does not avail himself of this, the system
returns to automatic gear selection which,
70 according to the flow diagram, begins at a signal
processing operation step denoted BS 32, at
which an acceleration value stored in an
acceleration register by means of the interrupt
program is read. In a subsequent comparing
75 operation step denoted JS 33, it is determined
whether the speed change value constitutes a
retardation value which exceeds a given
predetermined retardation value, e.g. 5 m/s². If
this is the case, e.g. as a result of wheel locking
80 during braking, the program chooses to follow a
flow path to an operation step denoted BS 35, at
which a signal value representing great
retardation is noted in a retardation notation
register in the RAM 29. After BS 35 there is an
85 operation step denoted BS 36, where selection of
neutral gear is made, the gear change program
thereafter being terminated by an operation step
denoted BS 47, where indication of the selected
gear on the display unit is catered for.
90   If said predetermined retardation value in JS 33
is not exceeded, the flow path 30 leads to a
further comparing operation step denoted JS 37,
at which it is determined whether a fault memory
in the RAM 29 has registered a value representing
95 a fault in respect of the speed transducer, which
can take place at a run-through of another part of
the gear change program. When registering a
speed error in the fault memory, the program
chooses to follow a flow path 38 to BS 36, where
100 neutral gear is selected. If a speed fault has not
been detected, there is a following operation step
denoted JS 39 where the system checks whether
great retardation is still noted in the retardation
notation register. If this is not the case, the
105 program follows a flow path 40 to an operation
step denoted BS 46, at which the gear selection is
catered for in a manner which is not described in
more detail here for utilizing the values of speed,
speed change and load produced in the interrupt
110 program for selecting a suitable gear from tables
stored in the PROM 28. If great retardation
notation remains in the retardation notation
register, the flow path 30 leads to an operation
step denoted BS 41, where it is determined
115 whether the last-noted speed value in the
interrupt program falls below a certain
predetermined speed, which to advantage is
selected such as to correspond to a vehicle speed
of about 10 km/h. If said speed is underpassed, a
120 flow path 42 leads directly to the terminating
BS 47, where the neutral gear already selected in
BS 36 is registered and indicated. If the
predetermined speed is exceeded, the flow path
30 leads to a comparing operation step denoted
125 JS 43, where it is determined whether the last-
noted speed change exceeds a given
predetermined limiting value, which to advantage
corresponds to a wheel speed change of about
1 m/s². If the limiting value for the speed change is
130 exceeded, a flow path 44 leads directly to the

terminating BS 47, which holds information that the neutral gear already selected in BS 36 is the recommended gear. If the limiting value sought for in JS 43 is underpassed, the program continues to
5 an operation step denoted BS 45, which ensures that the notation "great retardation" in the retardation notation register is cancelled. In practice, this means that the vehicle wheel has now resumed a stable state relative the
10 substructure, and the system can return to the ordinary gear selection routine carried out in . BS 46. The gear selected in BS 46 is subsequently indicated in the manner mentioned in BS 47.

CLAIMS
15   1. A method of preventing in a vehicle gearbox coacting with a system for automatic gear selection the selection of an operationally incorrect gear in the case where the rotational speed of a vehicle wheel does not constitute a
20 correct representation of the vehicle speed, e.g. during braking of the vehicle, means in the control system calculating the instantaneous rotational speed change of the wheel and comparing it with a predetermined retardation value, as well as
25 sending an output signal if the calculated rotational speed change exceeds said predetermined retardation value, said output signal activating an operative circuit or the like which thereby caters for the selection of a neutral
30 gear position and/or triggers fault indication in alarm means, characterized in that the activation of the operative circuit is interrupted when the wheel speed represents a given vehicle speed and the wheel speed change calculated in the system
35 is lower than a predetermined value.

  2. A method as claimed in Claim 1, characterized in that activation of the operative circuit is interrupted when the sensed wheel speed corresponds to a vehicle speed of about
40 10 km/h.

  3. A method as claimed in Claim 1 or 2, characterized in that the predetermined value of the wheel speed change for a return to normal gear selection is about 1 m/s^2.

45   4. A method of preventing 'n a vehicle gearbox substantially as hereinbefore described with reference to and as shown in the accompanying drawings.